

05/19/99



# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C13531

First Named Inventor or Application Identifier

TAKAYUKI KIKUCHI

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages
3. ☒ Drawing(s) (35 USC 113) Total Sheets
4. ☒ Oath or Declaration Total Pages
- a. ☒ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting  
inventor(s) named in the prior application, see  
37 CFR 1.63(d)(2) and 1.33(b).

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

☐ Incorporation By Reference (useable if Box 4c is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4c, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☐ Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	19-20 =	0	X \$ 18.00 =	\$0
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	3-3 =	0	X \$ 78.00 =	\$0
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$760.00
	Total of above Calculations =				\$760.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				0
	TOTAL =				\$760.00

## 19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 760.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	JOSEPH W. RAGUSA, ESQ.
SIGNATURE	<i>Joseph W. Ragusa (38.586)</i>
DATE	May 18, 1999

- 1 -

DATA PROCESSING APPARATUS AND METHOD  
AND  
COMPUTER READABLE STORAGE MEDIUM

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a data processing  
apparatus and method for encoding, multiplexing and  
outputting digitalized video and audio data, and a  
10 computer readable storage medium storing data  
processing programs realizing the data processing  
method.

Related Background Art

As international standards for a coding system of  
15 video, audio and other data, JPEG (Joint Photographic  
Coding Experts Group), H. 261 and MPEG (Moving Picture  
Coding Experts Group) which is an improved version of  
JPEG and H. 261 are known.

In the present days called a multimedia period  
20 collectively dealing with video, audio and other data,  
MPEG-1 as improved MPEG and further MPEG-2 as improved  
MPEG-1 are adopted.

Of these specifications, MPEG-2 is specifications  
which are recommended for transmitting video, audio and  
25 other data at a high quality in a limited transmission  
band. Equipments compatible with the specifications of  
MPEG-2 are in the main stream. For example, with MPEG-

2, not only a desired number of respective encoded streams of video, audio and other data can be multiplexed into one stream (PS: Program Stream) as a set of programs, but also a plurality of programs can be constituted as one stream (TS: Transport Stream).

In a digital transmission apparatus compatible with the specifications of MPEG-2, an encoder unit of the apparatus encodes audio and video data and packetizes it into a PES (Packetized Elementary Stream) which is again packetized into a TS packet and transmitted.

Packetizing will be specifically described by paying attention to audio data.

An audio data compression circuit of a digital transmission apparatus first compresses audio data in accordance with a predetermined scheme (e.g., ISO/IEC 11172-3), to form AAU's (Audio Access Units) each having a compression/expansion base unit and output an AES (Audio Elementary Stream) constituted of AAU's.

More specifically, as shown in Fig. 1A, AES constituted of AAU0, AAU1,... is output.

Next, as shown in Fig. 1B, AES is packetized in the unit of AAU, and a PTS (Presentation Time Stamp) is loaded in a header field (PES header) of each packet (PES packet). This packet as an audio PES is passed to the next process. According to ISO/IEC 13818-1, it stipulates that although it is not necessarily required

to load PTS in each PES header, PTS is required to be loaded and transmitted at least once per 700 ms.

At the next process, as shown in Fig. 1C, each PES packet is further packetized into a transmission packet (TS packet) to make it have a fixed length size  
5 suitable for a transmission path. In order to make each packet have the same packet length, invalid data (stuff data) is added if necessary as shown in Fig. 1C.

In a header field (TSP header) of a TS packet, a  
10 PID (Packet Identification) for identifying data (such as audio data and video data) stored in the packet, a PCR (Program Clock Reference) and the like are loaded. According to ISO/IEC 13818-1, it stipulates that although it is not necessarily required to load PCR in  
15 each TSP header, PCR is required to be loaded and transmitted at least once per 100 ms.

As above, audio data is transmitted as a TS packet.

AAU is the minimum unit which can be recovered  
20 independently, and is always constituted of data having a constant number of samples. Namely, AAU is constituted of data sampled during a predetermined period and having a fixed length preset for each compression factor.

25 PES including AAU's is packetized into each PES packet in the unit of AAU, and each PES packet is further packetized (divided) into a fixed length TS

packet. In this case, it is not guaranteed that the data length of AAU, i.e., the data length of the PES packet, is an integer multiple of the data length of the TS packet. When each PES packet of PES is  
5 packetized and if the data of the PES packet is insufficient for the TS packet, the staff data is inserted into the last TS packet to make all TS packets have the same packet length.

As above, the data length of AAU (data length of  
10 the PES packet) has no definite relation to the data length of the TS packet and hence to the data length of the last TS packet. Therefore, the length of the staff data to be inserted so as to make the last TS packet have the fixed length is uncertain, which results in a  
15 reduction of the capacity of a transmission path.

#### SUMMARY OF THE INVENTION

Under the above-described background, it is an object of the present invention to provide a data  
20 processing apparatus and method capable of improving more than conventional an efficiency of a transmission path along which encoded data is transmitted, and a storage medium storing program software which executes the data processing method.

25 According to one preferred embodiment, a data processing method is provided which comprises the steps of: inputting data; compression-encoding the data;

packetizing the encoded data into a first data train on a basis of a first data length; packetizing the generated first data train into a second data train on a basis of a second data length; and controlling the first data length at said first packetizing step in accordance with the second data length.

According to another preferred embodiment, a computer readable storage medium storing an image processing program is provided, the program comprising:

an input step of inputting data; an encoding step of compression-encoding the data; a first packetizing step of packetizing the data encoded by said encoding step into a first data train on a basis of a first data length; a second packetizing step of packetizing the first data train generated by said first packetizing step into a second data train on a basis of a second data length; and a control step of controlling the first data length at said first packetizing step in accordance with the second data length.

Other objects, features and advantages of the invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A, 1B and 1C are diagrams illustrating packetizing of audio data.

Fig. 2 is comprised of Figs. 2A and 2B illustrating block diagrams showing the structure of a digital data transmission system according to an embodiment of the invention.

5 Figs. 3A, 3B and 3C are diagrams illustrating packetizing of audio data according to the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the invention will be described  
10 with the accompanying drawings.

Figs. 2A and 2B are block diagrams showing the structure of a data processing system according to an embodiment of the invention.

This data processing system is a system compatible  
15 with the specifications of MPEG-2. As shown in Figs. 2A and 2B, the data processing system includes a camera unit 10, an encoder unit 100, a decoder unit 200 and a monitor unit 400. Video and audio data taken with the camera unit 10 is supplied to the encoder unit 100.

20 The encoder unit 100 compresses and encodes the video and audio data and then packetizes it. The packetized data is transmitted via a transmission path 300 to the decoder unit 200. The decoder unit 200 decodes the encoded video and audio data and the monitor 400  
25 outputs decoded video and audio data.

The camera unit 10 supplies video data of an image taken with an unrepresented camera and audio data



picked up with an unrepresented microphone to the encoder unit 100.

The encoder unit 100 has: an input terminal 101 to which audio data supplied from the camera unit 10 is applied; an input terminal 102 to which video data supplied from the camera unit 10 is applied; an audio data compression circuit 104 to be supplied with an output from the input terminal 101; a video data compression circuit 106 to be supplied with an output from the input terminal 102; a compressed audio data packeting circuit 107 to be supplied with an output from the audio data compression circuit 104; and a compressed video data packeting circuit 109 to be supplied with an output from the video data compression circuit 106.

The encoder unit 100 has also: a multiplex transmission packeting circuit 110 to be supplied with the outputs from the audio and video data packeting circuits 107 and 109; a modulation circuit 111 to be supplied with an output of the multiplex transmission packeting circuit 110; a compression control circuit 105 for controlling the compression to be executed by the audio data compression circuit 104; a reference time generation circuit 103 for generating and supplying timing signals to the audio data compression circuit 104, video data compression circuit 106 and multiplex transmission packeting circuit 110. An

output of the modulation circuit 111 is supplied via a transmission path 300 to the decoder unit 200.

The decoder unit 200 has: a demodulation circuit 201 for receiving data from the transmission path; a multiplexed data separation circuit 202 for receiving data from the demodulation circuit 201; a compressed audio data depacketing circuit 203 and a compressed video data depacketing circuit 204 respectively receiving data from the multiplexed data separation circuit 202; a reference time recovery circuit 205; an audio data decoding circuit 206 to be supplied with outputs from the compressed audio data depacketing circuit 203 and reference time recovery circuit 205; and a video data decoding circuit 207 to be supplied with outputs from the compressed video data depacketing circuit 204 and reference time recovery circuit 205. An output of the audio data decoding circuit 206 is output via an output terminal 208, and an output of the video data decoding circuit 207 is output via an output terminal 209. Outputs from the output terminals 208 and 209 are supplied to the monitor unit 400 which outputs images and sounds.

The most characteristic structure of the digital transmission system described above is a packet size control circuit 108 provided in the encoder unit 100.

The packet size control circuit 108 controls the audio data compression circuit 108 which is controlled

also by the compression control circuit 105, and also controls the compressed audio data packeting circuit 107.

5 A series of operations of the digital transmission system will be described first.

Audio and video data output from the camera unit 10 is applied to the input terminals 101 and 102.

10 In the encoder unit 100, analog audio data is applied to the input terminal 101, whereas analog video data is applied to the input terminal 102.

15 The reference time generator circuit 103 supplies the multiplex transmission packeting circuit 110 with a time of an audio signal input to the input terminal 101 and a time of a video signal input to the input terminal 102, as program clock reference (PCR) values. The reference time generation circuit 103 also supplies the audio and video signal compression circuits 104 and 106 with timing signals referenced to PCR.

20 The decoder unit 200 is required to synchronously decode audio and video data.

25 The audio and video data compression circuits 104 and 106 (an audio-video input processing series) define the times of their signal inputs by using the timing information representative of the common reference time (PCR) (timing signals generated by the reference time generation circuit 103). The defined times are used as time management information (PTS: Presentation Time

Stamp). Namely, the audio and video data compression  
circuits 104 and 106 counts the sampled (or input)  
times of analog audio and video data by a 90 kHz  
counter called a PCR and supply representative values  
5 of the counts to the decoder unit 200, as PTS.

More specifically, the audio data compression  
circuit 104 converts analog audio data applied to the  
input terminal 101 into digital audio data and  
generates PTS indicating the sampling timings of the  
10 audio data, in accordance with the timing signals  
supplied from the reference time generation circuit  
103. The audio data compression circuit 104 supplies  
the digital audio data and generated PTS to the  
compressed audio data packeting circuit 107.

15 The audio data compression circuit 104 encodes  
(compresses) the audio data by using correlation or the  
like and generates each audio access unit (AAU) having  
a compression/expansion base unit, under the control of  
the compression control circuit 105. The audio data  
20 compression circuit 104 supplies the compressed audio  
data packeting circuit 107 with an audio elementary  
stream (AES) constituted of generated AAU's.

In this case, the compression control circuit 105  
controls a compression factor of the audio data  
25 compression circuit 104.

The video data compression circuit 106 converts  
analog video data applied to the input terminal 102

into digital video data and generates PTS indicating the sampling timings of the video data, in accordance with the timing signals supplied from the reference time generation circuit 103. The audio data  
5 compression circuit 106 supplies the digital video data and generated PTS to the compressed video data packeting circuit 109.

The video data compression circuit 106 encodes (compresses) the video data by using correlation or the  
10 like and generates each video access unit (VAU) having a compression/expansion base unit. The video data compression circuit 106 supplies the compressed video data packeting circuit 109 with a video elementary stream (VES) constituted of generated VAU's.

15 The compressed audio data packeting circuit 107 packetizes AES supplied from the audio data compression circuit 104 under the control of the packet size control circuit 108 to be described later, and loads PTS supplied from the audio data compression circuit  
20 104 in the header field (PES header) of each packet (PES packet). A packetized elementary stream (PES) constituted of the PES packets is supplied to the multiplex transmission packeting circuit 110.

The compressed video data packeting circuit 109  
25 packetizes VES supplied from the video data compression circuit 106 in the unit of VAU, and loads PTS supplied from the video data compression circuit 106 in the

header field of each packet. A PES constituted of the packets is supplied to the multiplex transmission packeting circuit 110.

5 The multiplex transmission packeting circuit 110 cuts off each PES supplied from the compressed audio and video data packeting circuits 107 and 109 to have a size suitable for the transmission path 300 and form a transmission packet (TS packet). The header field (TSP header) of each TS packet is loaded with program  
10 identification information (PID (Packet Identification) information for identifying whether the packet is video or audio data), PCR supplied from the reference time generation circuit 103, and other information. A transport stream (TS) constituted of TS packets with  
15 the header information is supplied to the modulation circuit 111.

According to ISO/IEC 13818-1, it stipulates that although it is not necessarily required to load PCR in each TS packet, PCR is required to be loaded and  
20 transmitted at least once per 100 ms.

The modulation circuit 111 modulates TS supplied from the multiplex transmission packeting circuit 110 so as to make it suitable for the characteristics of the transmission path 300, and supplies the modulated  
25 TS to the decoder unit 200 over the transmission path 300. The transmission path 300 may be a recording medium such as a tape, a wired path, a wireless path,

or the like.

Upon reception of the modulated TS, the demodulation circuit 201 of the decoder unit 200 demodulates the TS and supplies the demodulated TS to  
5 the multiplex data separation circuit 202.

The multiplex data separation circuit 202 checks PID contained in each TS packet of TS supplied from the demodulation circuit 201. If PID indicates audio data, data in a data field (pay load) of the TS packet is  
10 supplied to the compressed audio data depacketing circuit 203. If PID indicates video data, data in the data field of the TS packet is supplied to the compressed video data depacketing circuit 204.

The multiplex data separation circuit 202 also  
15 derives PCR from each TS packet of TS supplied from the demodulation circuit 201, and supplies it to the reference time recovery circuit 205.

The compressed audio data depacketing circuit 203 extracts PTS from the data supplied from the multiplex  
20 data separation circuit 202, and supplies it to the audio data decoding circuit 206.

The compressed audio data depacking circuit 203 also recovers AAU from the data supplied from the multiplex data separation circuit 202, and supplies it  
25 to the audio data decoding circuit 206.

The compressed video data depacketing circuit 204 derives PTS from the data supplied from the multiplex

data separation circuit 202, and supplies it to the video data decoding circuit 207.

The compressed audio data depacking circuit 204 also recovers VAU from the data supplied from the multiplex data separation circuit 202, and supplies it to the video data decoding circuit 207.

The reference time recovery circuit 205 generates a system clock from PCR supplied from the multiplex data separation circuit 202, by using a PLL or the like, to thereby recover PCR which was intermittently received. The reference time recovery circuit 205 supplies the recovered PCR to the audio and video data decoding circuits 206 and 207.

The audio data decoding circuit 206 decodes (expands) AAU supplied from the compressed audio data depacketing circuit 203 to obtain digital audio data. The audio data decoding circuit 206 compares PTS supplied from the compressed audio data depacketing circuit 203 with PCR supplied from the reference time recovery circuit 205, and at a timing determined by the comparison result, converts the digital audio data into analog audio data which is output as an audio signal via the output terminal 208.

The video data decoding circuit 207 decodes (expands) VAU supplied from the compressed video data depacketing circuit 204 to obtain digital video data. The video data decoding circuit 207 compares PTS



supplied from the compressed video data depacketing circuit 204 with PCR supplied from the reference time recovery circuit 205, and at a timing determined by the comparison result, converts the digital video data into analog video data which is output as a video signal via the output terminal 209.

The monitor unit 400 receives the audio and video data decoded by the decoder unit 200 and outputs it.

A series of operations of the digital transmission system has been described above.

Next, packeting audio data under the control of the packet size control circuit, which is the most characteristic feature of the digital transmission system, will be specifically described.

First, the audio data compression circuit 104 compresses audio data at a compression factor designated by the compression control circuit 105 to thereby generate AAU, in accordance with a predetermined scheme (e.g., ISO/IEC 11172-3), and outputs AES constituted of generated AAU's. Therefore, the audio data compression circuit 104 outputs AES constituted of, for example, AAU0, AAU1, AAU2,... as shown in Fig. 3A. At the same time, the audio data compression circuit 104 also outputs PTS.

Next, the compressed audio data packeting circuit 107 packetizes AES output from the audio data compression circuit 104, and loads PTS output from the

audio data compression circuit 104 in the header field (PES header) of each packet (PES packet). Packetizing at this time is executed under the control of the packet size control circuit 108.

5           More specifically, the packet size control circuit 108 determines the packet length of a PES packet corresponding to AES having the compression factor designated by the compression control circuit 105 and set at the audio data compression circuit 104.

10           AAU is a data train compressed by using audio data of 24 ms as one unit. According to ISO/IEC 111723, it stipulates that although it is not necessarily required to load PTS in each PES header, PTS is required to be loaded and transmitted at least once per 700 ms.

15           Therefore, the packet size control circuit 108 determines "m" which makes a calculation result of the following formula (1) have "0" or a "positive" value nearest to "0". The packet size control circuit 108 supplies this value "m" to the compressed audio data  
20           packetizing circuit 107, as information on the number of AAU's to be packetized.

$$TSd * n - (AAUd * m + Lpesh) \quad \dots (1)$$

where TSd is the number of pay loads of the TS packet, AAUd is the data length of AAU, Lpesh is the data  
25           length of PES, n is an arbitrary integer, and m is an integer which satisfies  $m \times 24 \text{ ms} < 700 \text{ ms}$ .

The packet size control circuit 108 supplies the

determined "m" to the compressed audio data packeting circuit 107.

5 The packet size control circuit 108 may determine "m" by calculating the formula (1) or may determine it by using a table which stores a correspondence between each compression factor and "m".

10 Therefore, as shown in Fig. 3B, the compressed audio data packeting circuit 107 packetizes AAU's in the unit of the number (in the example shown in Fig. 3B,  $m = 2$ ) of AAU's designated by the packet size control circuit 108, loads PTS in the header field (PES header) of each packet (PES packet), and outputs it as PES.

15 The multiplex transmission packeting circuit 110 further packetizes PES output from the compressed audio data packeting circuit 107, as shown in Fig. 3C, to have the size of a fixed length suitable for the transmission path 300, and outputs it as TS.

20 If the calculation result of the formula (1) made by the packet size control circuit 108 to determine the number of AAU's contained in a PES packet, i.e., the value of "m", is not "0", the multiplex transmission packeting circuit 110 packetizes a PES packet into TS packets by adding, if necessary, staff data to the last  
25 TS packet in order to make the last TS packet have the fixed length. In this case, however, since the compressed audio data packeting circuit 107 packetizes

AES into PES packets under the control of the packet size control circuit 108, the amount of staff data can be made minimum.

5 With the above configuration, a redundancy can be reduced when PES constituted of fixed length data such as an AAU is packetized into a TS packet having a fixed length.

10 The present invention may be applied to a system constituted of a plurality of apparatuses (e.g., a host computer, interface units, a reader, a printer, and the like) or to a system constituted of a single apparatus (e.g., a digital VTR, a digital camera, a digital television or the like). Namely, the invention is applicable to a partially or wholly integrated  
15 combination of the camera unit 10, encoder unit 100, decoder unit 200 and monitor unit 400.

20 The scope of the invention also includes a system or apparatus whose computer (CPU or MPU) runs to operate various devices connected thereto in accordance with software program codes supplied to the system or apparatus so as to realize the functions of the above embodiments.

25 In this case, the software program codes themselves realize the embodiment functions. Therefore, the program codes themselves and means for supplying such program codes to a computer, e.g., a storage medium storing such program codes, constitute

the present invention.

The storage medium storing such program codes may be a floppy disk, a hard disk, an optical disk, a magneto-optical disk, a CD-ROM, a magnetic tape, a non-  
5 volatile memory card, a ROM, and the like.

Obviously, such program codes are other types of embodiments of this invention, not only for the case wherein the embodiment functions are realized by executing the program codes supplied to the computer  
10 but also for the case wherein the embodiment functions are realized by the program codes used with an OS (operating system) on which the computer runs or with other various types of application software.

Furthermore, the scope of the invention also  
15 includes obviously the case wherein in accordance with the program codes stored in a memory of a function expansion board or unit connected to the computer supplied with the program codes, a CPU or the like of the function board or unit executes part or the whole  
20 of the actual tasks for realizing the embodiment functions.

In other words, the foregoing description of embodiments has been given for illustrative purposes only and not to be construed as imposing any limitation  
25 in every respect.

The scope of the invention is, therefore, to be determined solely by the following claims and not

[illegible]

WHAT IS CLAIMED IS:

1. A data processing apparatus comprising:

a) input means for inputting data;

5 b) encoding means for compression-encoding the data;

c) first packetizing means for packetizing the data encoded by said encoding means into a first data train on a basis of a first data length;

10 d) second packetizing means for packetizing the first data train generated by said first packetizing means into a second data train on a basis of a second data length; and

15 e) control means for controlling the first data length used by said first packetizing means in accordance with the second data length.

2. A data processing apparatus according to claim 1, wherein said encoding means compression-encodes the data on a basis of a predetermined data length, and  
20 said control means controls the first data length in accordance with the predetermined encoding data length and the second data length.

3. A data processing apparatus according to claim 25 2, wherein said control means controls the first data length to have a value being equal to N (N: integer) times the predetermined encoding data length and near

to a value not exceeding L (L: integer) times the  
second data length.

4. A data processing apparatus according to claim  
5 1, wherein the data is audio data.

5. A data processing apparatus according to claim  
2, further comprising:

reference time information generation means for  
10 generating reference time information; and

time management information generation means for  
generating time management information representative  
of an input time of the data to said input means, in  
accordance with the reference time information,

15 wherein said first packetizing means adds the time  
management information to the first data train based  
upon a first period, and said second packetizing means  
adds the reference time information to the second data  
train based upon a second period.

20 6. A data processing apparatus according to claim  
5, wherein said control means controls the first data  
length in accordance with the time management  
information.

25 7. A data processing apparatus according to claim  
6, wherein the reference time information is PCR of



MPEG specifications and the time management information is PTS of MPEG standard.

5 8. A data processing apparatus according to claim  
6, wherein said control means controls the first data  
length to maximize the predetermined encoding data  
length satisfying the first period and have a value  
being equal to a minimum common multiple of the  
predetermined encoding data length and the second data  
10 length or being equal to N (N: integer) times the  
predetermined encoding data length and near to a value  
not exceeding L (L: integer) times the second data  
length.

15 9. A data processing apparatus according to claim  
1, wherein said encoding means can change a compression  
factor.

20 10. A data processing apparatus according to  
claim 1, wherein said second packetizing means adds, if  
necessary, redundant data to form the second data  
train.

25 11. A data processing apparatus according to  
claim 1, further comprising:  
image data input means for inputting image data;  
image data encoding means for compression-encoding

the image data; and

third packetizing means for packetizing the image data encoded by said encoding means on a basis of a third data length,

5        wherein said second packetizing means packetizes the third data train generated by said third packetizing means on a basis of the second data length.

12. A data processing apparatus according to  
10       claim 11, wherein said image data encoding means compression-encodes the image data in conformity with MPEG.

13. A data processing apparatus according to  
15       claim 11, further comprising a video camera for outputting the data and the image data.

14. A data processing apparatus according to  
20       claim 11, further comprising transmission means for transmitting the second data train.

15. A data processing apparatus according to  
claim 14, further comprising decoding means for  
decoding the second data train transmitted by said  
25       transmission means.

16. A data processing apparatus according to

claim 15, further comprising display means for displaying the image data decoded by said decoding means.

5           17. A decoding apparatus for decoding the second data train transmitted by the data processing apparatus recited in claim 14.

10           18. A data processing method comprising the steps of:  
            inputting data;  
            compression-encoding the data;  
            packetizing the encoded data into a first data train on a basis of a first data length;  
15           packetizing the generated first data train into a second data train on a basis of a second data length;  
            and  
            controlling the first data length at said first packetizing step in accordance with the second data  
20           length.

            19. A computer readable storage medium storing an image processing program, the program comprising:  
            an input step of inputting data;  
25           an encoding step of compression-encoding the data;  
            a first packetizing step of packetizing the data encoded by said encoding step into a first data train

on a basis of a first data length;

a second packetizing step of packetizing the first  
data train generated by said first packetizing step  
into a second data train on a basis of a second data  
length; and

a control step of controlling the first data  
length at said first packetizing step in accordance  
with the second data length.

66750 " 447460

ABSTRACT OF THE DISCLOSURE

A data processing apparatus and method and a computer readable storage medium storing data processing programs realizing the data processing method, capable of preventing transmission of unnecessary redundant data and efficiently utilizing a transmission path. In the data processing method, data is input, the data is compression-encoded, the encoded data is packetized into a first data train on a basis of a first data length, the generated first data train is packetized into a second data train on a basis of a second data length, and the first data length is controlled in accordance with the second data length.

15 .

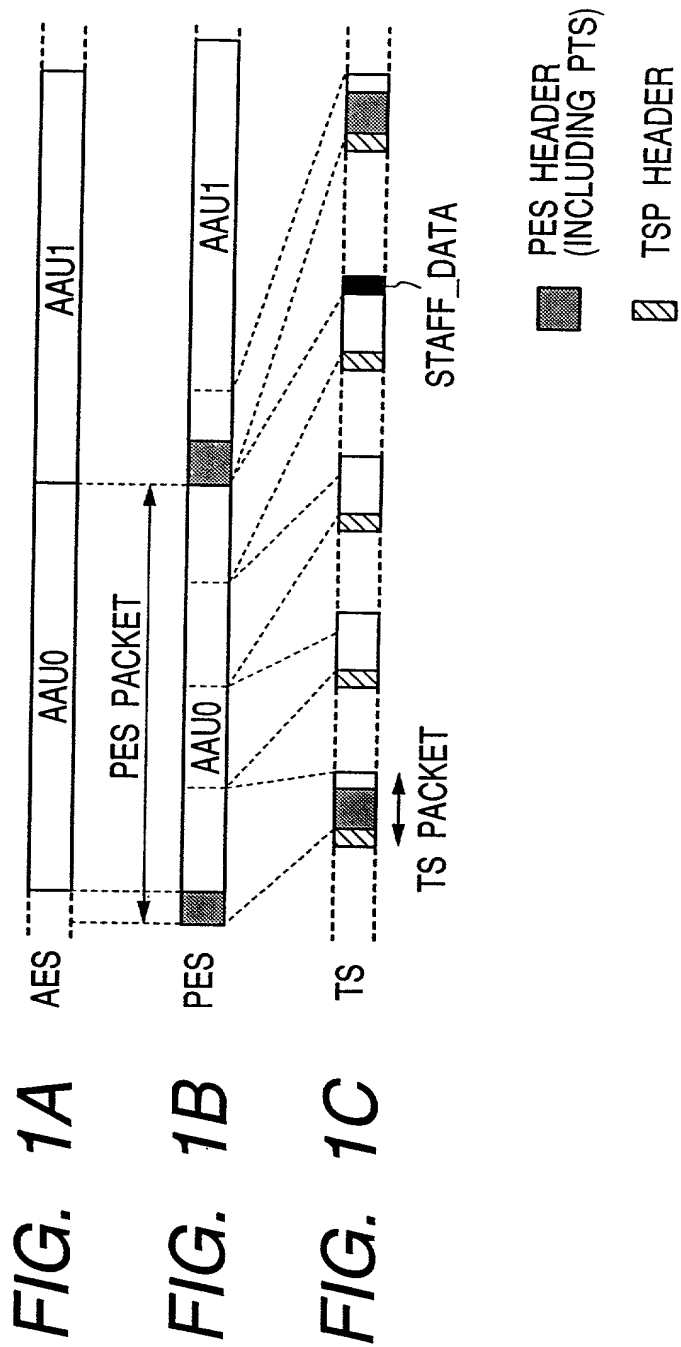


FIG. 2

FIG. 2A

FIG. 2A    FIG. 2B



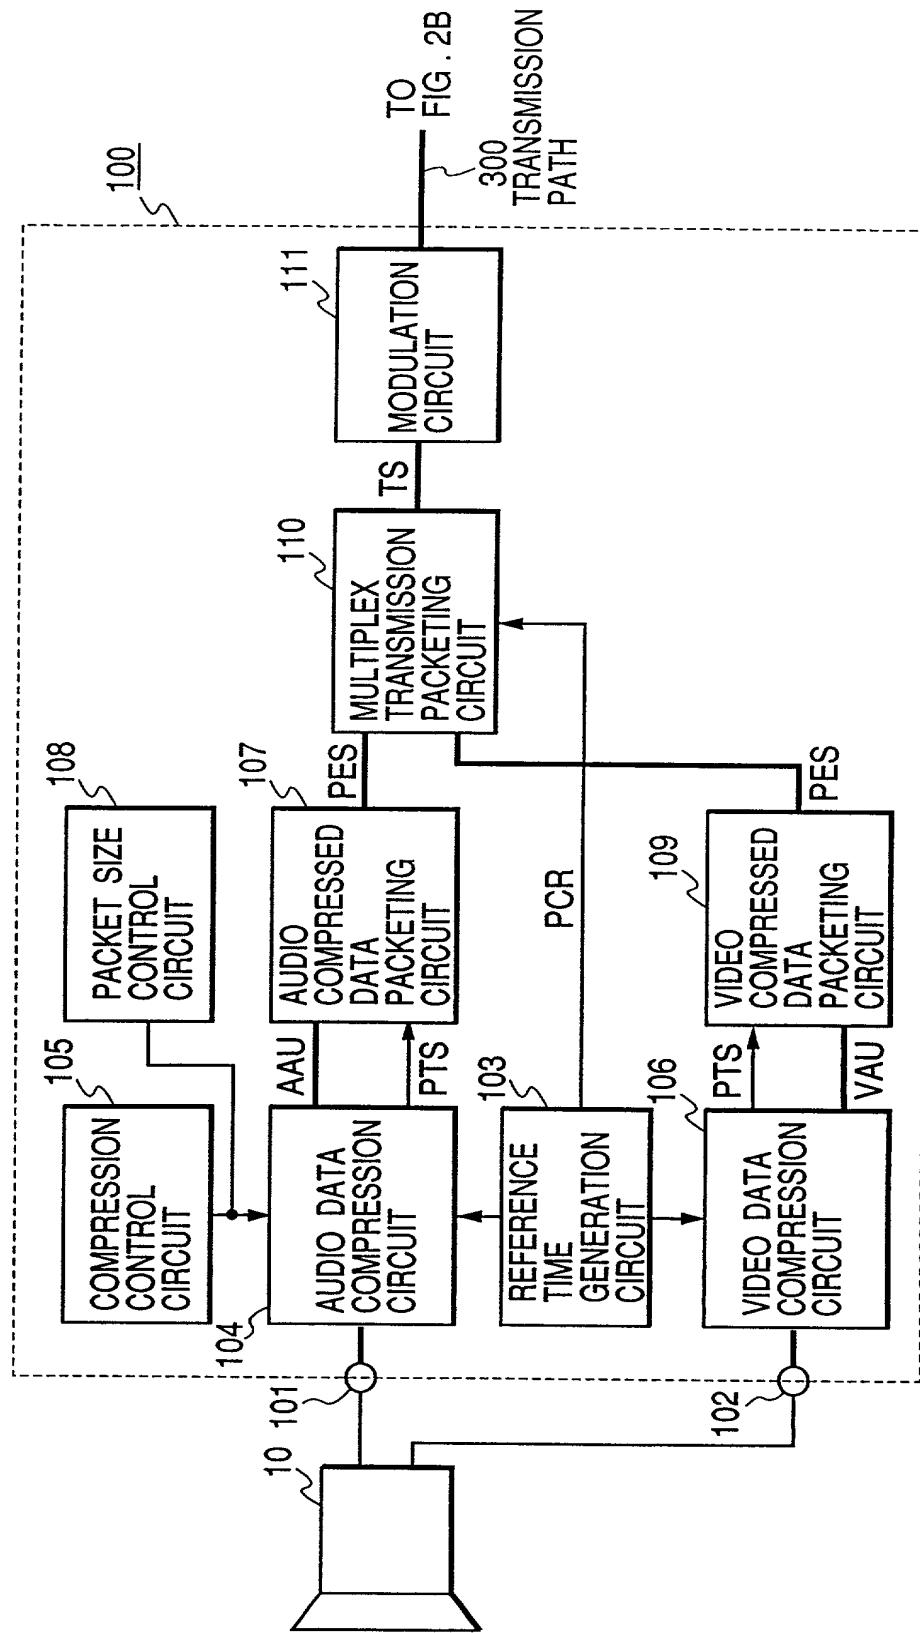


FIG. 2B



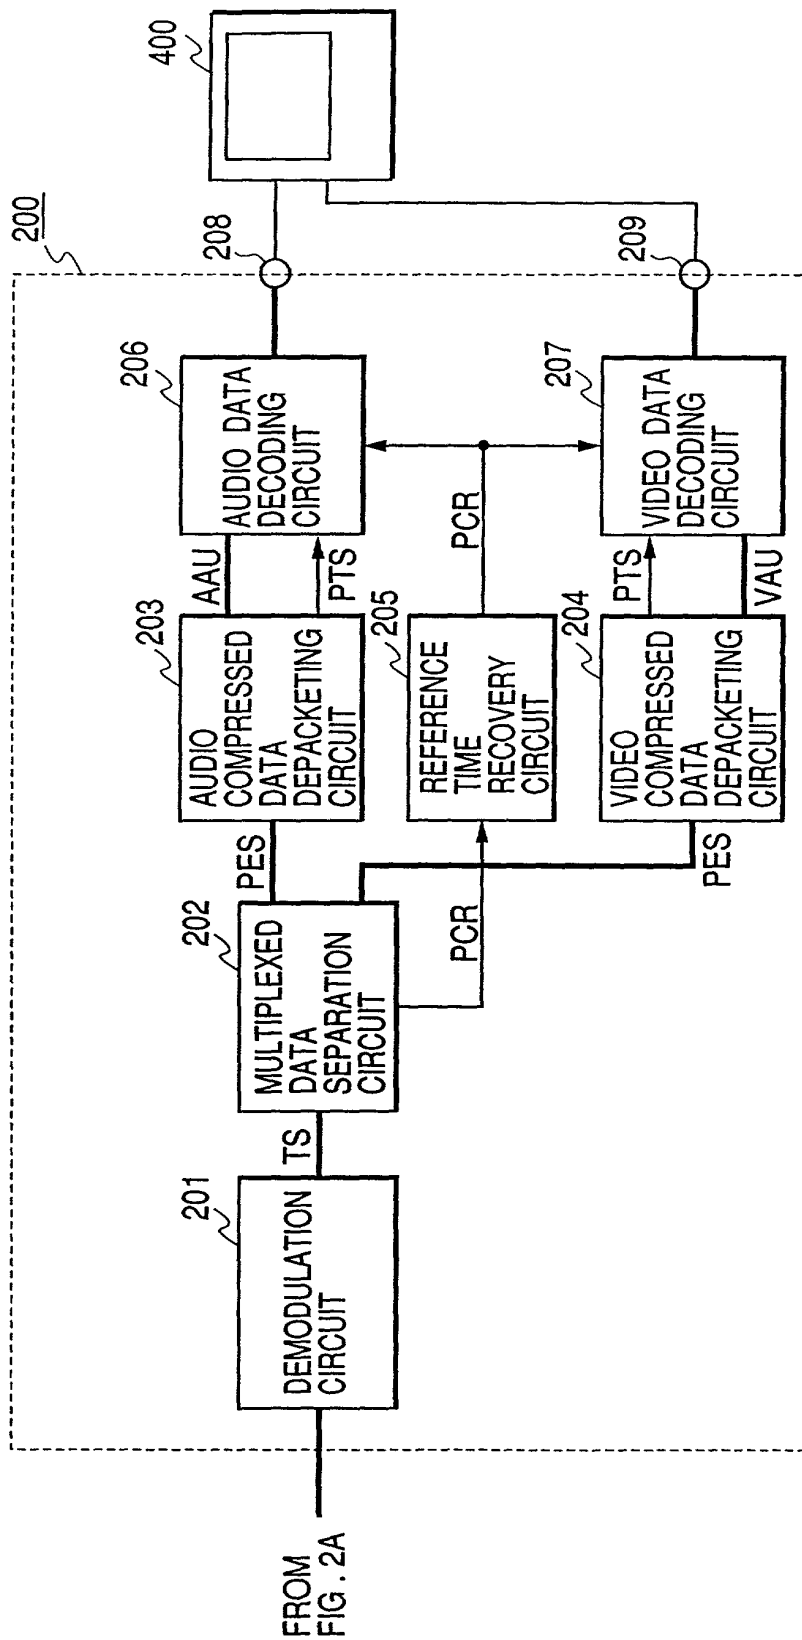

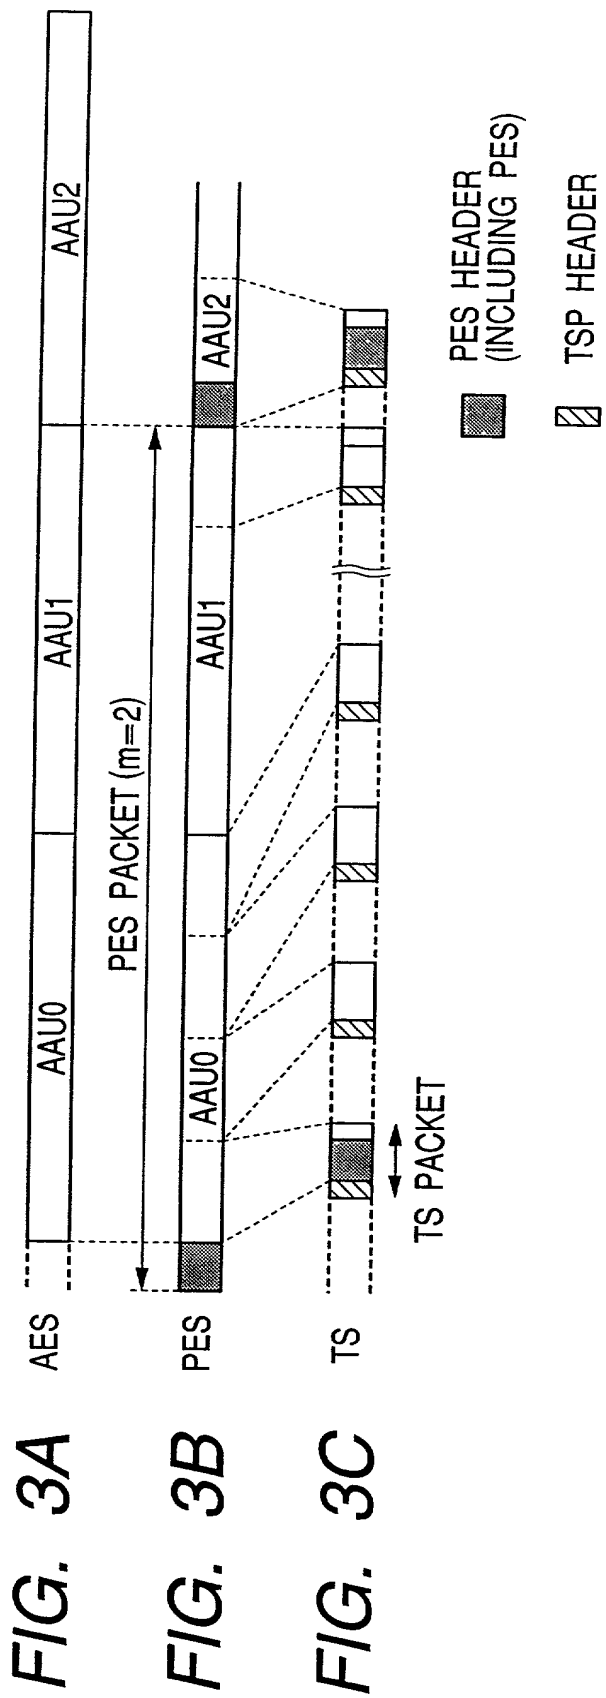

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**  
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DATA PROCESSING APPARATUS AND METHOD AND COMPUTER READABLE STORAGE MEDIUM

the specification of which ☒ is attached hereto ☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No)</u> <u>Priority Claimed</u>
Japan	10-141630	22 May 1998	Yes

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TAKAYUKI KIKUCHI

Inventor's signature Takayuki Kikuchi

Date May 14, 1999 Citizen/Subject of Japan

Residence 7-4-2-101, Hosekidai 3-chome, Takanezawa-machi, Shioya-gun, Tochigi-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any \_\_\_\_\_

Second Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_ Citizen/Subject of \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_